

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 5/142	A1	(11) International Publication Number: WO 99/56803 (43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/US99/08408 (22) International Filing Date: 16 April 1999 (16.04.99) (30) Priority Data: 09/070,051 30 April 1998 (30.04.98) US (71) Applicant: MEDTRONIC, INC. [US/US]; 7000 Central Avenue N.E., Minneapolis, MN 55432 (US). (72) Inventors: MC MULLEN, Ray; 6055 Maple Leaf Circle, Shorewood, MN 55331 (US). KRATOSKA, Paul; 8670 Emerson Avenue North, Brooklyn Park, MN 55444 (US). GARDNER, Anthony; 400 Groveland Avenue #709, Minneapolis, MN 55403 (US). (74) Agents: KINGHORN, Curtis, D. et al.; Medtronic, Inc. MS301, 7000 Central Avenue N.E., Minneapolis, MN 55432 (US).	(81) Designated States: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: INFUSION SYSTEMS WITH PATIENT-CONTROLLED DOSAGE FEATURES

(57) Abstract

An infusion system delivers drug to the patient at a fixed rate while permitting the patient to introduce a controlled bolus dosage when needed. A pump having a bulkhead that is provided with first and second flow paths from the pump reservoir to a single outlet port. The first flow path communicates with a first flow regulator which restricts flow in the first flow path to the desired fixed rate of delivery. The second flow path communicates with a patient-operated pump incorporated into the pump housing. The patient-operated pump may be in the form of a deformable reservoir that accumulates a drug bolus which may be expelled when the reservoir is compressed by the patient's fingers. A second flow regulator may be incorporated in the drug flow path upstream of the patient-operated pumping device to restrict the dosage that may accumulate therein. Additionally, a fluid control assembly incorporating a patient-controlled pump may be used with single or dual port pumps.

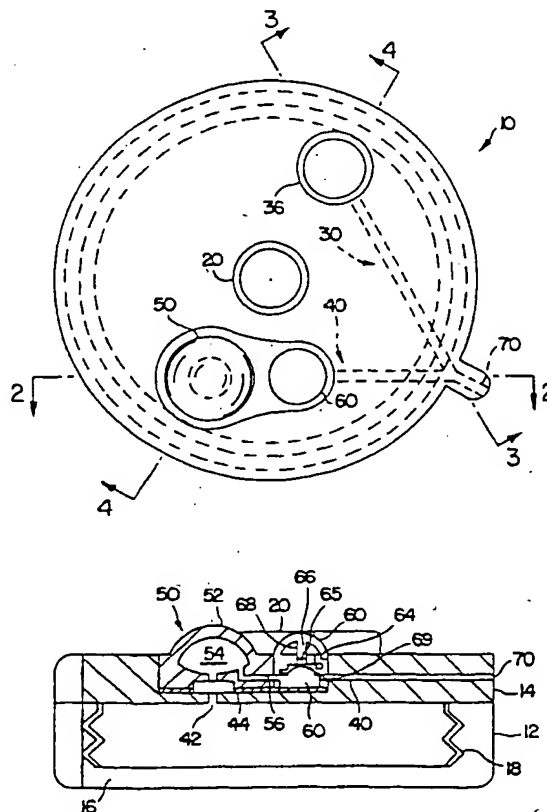

FOR THE PURPOSES OF INFORMATION ONLY			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AL	Albania	ES	Spain
AM	Armenia	FI	Finland
AT	Austria	FR	France
AU	Australia	GA	Gabon
AZ	Azerbaijan	GB	United Kingdom
BA	Bosnia and Herzegovina	GE	Georgia
BB	Barbados	GH	Ghana
BE	Belgium	GN	Guinea
BF	Burkina Faso	GR	Greece
BG	Bulgaria	HU	Hungary
BJ	Benin	IE	Ireland
BR	Brazil	IL	Israel
BY	Belarus	IS	Iceland
CA	Canada	IT	Italy
CF	Central African Republic	JP	Japan
CG	Congo	KE	Kenya
CH	Switzerland	KG	Kyrgyzstan
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea
CM	Cameroon	KR	Republic of Korea
CN	China	KZ	Kazakhstan
CU	Cuba	LC	Saint Lucia
CZ	Czech Republic	LI	Liechtenstein
DE	Germany	LK	Sri Lanka
DK	Denmark	LR	Liberia
EE	Estonia	LS	Lesotho
		LT	Lithuania
		LU	Luxembourg
		LV	Latvia
		MC	Monaco
		MD	Republic of Moldova
		MG	Madagascar
		MK	The former Yugoslav Republic of Macedonia
		ML	Mali
		MN	Mongolia
		MR	Mauritania
		MW	Malawi
		MX	Mexico
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SG	Singapore
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
		SZ	Swaziland
		TD	Chad
		TG	Togo
		TJ	Tajikistan
		TM	Turkmenistan
		TR	Turkey
		TT	Trinidad and Tobago
		UA	Ukraine
		UG	Uganda
		US	United States of America
		UZ	Uzbekistan
		VN	Viet Nam
		YU	Yugoslavia
		ZW	Zimbabwe

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Lichtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INFUSION SYSTEMS WITH PATIENT-CONTROLLED DOSAGE FEATURES

Field of the Invention

5 The present invention relates to drug delivery devices for delivering drugs to the body of a patient. More particularly, the present invention relates an implantable drug infusion system that delivers a fixed flow of drug and permits patient control of additional drug dosage.

Background of the Invention

10 The use of implantable drug infusion systems is well-known. These systems provide steady, long-term delivery of drug therapy to the human body. They also eliminate the need for frequent intravenous drug injections. Each system typically includes a refillable drug reservoir and flow control device for regulating the drug delivery rate.

15 One form of drug infusion system incorporates an implantable pump such as that disclosed in U.S. Patent Nos. 5,445,616 and 5,575,770. The subject matter of both patents is incorporated herein by reference. Pump-based systems provide constant flow of drug to the patient at very low rates. These pumps may be fixed rate pumps or programmable pumps. In the case of fixed-rate, adjustment of the delivery rate and therefore the drug dosage may not be altered. In case of programmable
20 pumps, reprogramming of the pump controller by a physician is required for changes in pump rate.

25 There is a current trend towards providing some degree of patient control in implantable drug infusion systems. Clinical studies show that actual drug usage may be reduced if a patient believes that he or she has some degree of control over drug dosage. A terminally-ill patient who has no ability to control or self-administer a drug will frequently insist on additional dosage at each visit to a physician as a precaution against exhaustion of the drug supply before the patient's next office visit. In addition to these patient psychological aspects, there are added benefits of patient control. For
30 example, in progressive diseases, the development of breakthrough pain may require

immediate increase in drug dosage. Similarly, a diabetic patient may need to tailor insulin dosage to maintain blood glucose levels through a changing diet. The ability to self-administer drug therapy may therefore reduce the number of office visits and provide immediate drug dosage increase when needed.

5 There have been prior efforts to provide drug infusion systems that offer patient-controlled dosage features. One known form of drug infusion system which includes patient controlled dosage features is a drug infusion pad, such as that disclosed in U.S. Patent No. 5,085,644, which permits a patient to self-administer drug therapy. Typically, this patient control of dosage is in the form of a deformable
10 chamber which may be compressed by the patient to deliver an intermittent supply of drug to the body. The infusion pad is implanted subcutaneously, usually over the rib cage to provide support against the forces of a patient's fingers compressing the reservoir. Known drug infusion pads, however, only provide for intermittent delivery of drug therapy and are therefore undesirable in applications where a steady flow of
15 drug is desired. The patient must continuously activate the infusion pad to receive medication. For example, U.S. Patent No. 5,085,644 discloses a patient-controlled infusion device which utilizes a deformable pumping chamber to permit a patient to intermittently administer a supply of drug from a main reservoir. The disclosed device utilizes a fluid flow restrictor to limit the recharge rate of the pumping
20 chamber.

 There is a yet unaddressed need in the medical field for a drug infusion system which offers the benefits of both fixed-rate delivery systems and patient control of dosage. Such a system would find application in therapy delivery for example, for cancer patients, who may need a fixed rate of drug delivered constantly and the ability
25 to administer themselves a bolus of drug when "breakthrough" pain occurs. Similarly, a diabetic patient may need, in addition to a steady supply of insulin, an additional dosage when the patient's diet has resulted in a lower than anticipated blood glucose level.

It would therefore be desirable to provide a drug infusion system which provides patient-control features in addition to the advantages offered by fixed rate delivery systems.

5 **Summary of the Invention**

 The invention provides an infusion system that delivers drug to the patient at a fixed rate and permits the patient to introduce a controlled bolus dosage when needed. In one preferred embodiment, the invention resides in a pump having a bulkhead that is provided with first and second flow paths from the pump reservoir to a single outlet
10 port. The first flow path communicates with a first flow regulator which restricts flow in the first flow path to the desired fixed rate of delivery. The second flow path communicates with a patient-operated pumping device incorporated into the pump housing. The patient-operated pumping device may be in the form of a deformable reservoir that accumulates a drug bolus which may be expelled when the reservoir is
15 compressed by the patient's fingers. A second flow regulator may be incorporated in the drug flow path upstream of the patient-operated pumping device to restrict the dosage that may accumulate therein. A safety valve may also be incorporated into the pump housing in downstream fluid communication with the patient-operated pumping device to prevent accidental discharge of the drug bolus.

20 In another preferred embodiment, the invention resides in a fluid control assembly that may be used with single or dual port pumps. The fluid control assembly comprises a body with an inlet port and an outlet port. Two fluid control paths are defined within the body between the ports. A first fluid control path is provided with a first flow regulator for regulating a fixed flow rate of drug between
25 the inlet and outlet ports. A second fluid control path is in fluid communication with a patient-controlled pumping device which accommodates a bolus of drug that may be expelled by the patient. Both first and second fluid control paths communicate with the inlet port and outlet port. A second flow regulator is disposed in the second flow path to limit the rate of accumulation of the drug bolus. The reservoir communicates

Brief Description of the Drawings

FIGURE 7 is a cross-section taken along lines 7-7 of FIGURE 6.

FIGURE 8 is a top view of a fluid control assembly according to another preferred embodiment of the invention..

Detailed Description of the Preferred Embodiments

5 Referring to FIGURES 1-4, an implantable pump 10 according to a preferred embodiment of the present invention comprises a pump housing 12 which, in conjunction with bulkhead 14, defines a bellows chamber 16 housing a bellows reservoir 18. Associated with bulkhead 14 are a number of features, including refill port 20, first flow path 30, second flow path 40, patient-controlled pump 50 and safety valve 60. Each of these features and their functional relationships will be described in detail below.

15 Bellows 18 forms with the lower surface of bulkhead 14 a variable volume reservoir for containing a supply of drug. The drug supply may be introduced through refill port 20 which includes a septum 22. A catheter or needle may be inserted through septum 20 to convey drug from an external supply (not shown) to refill chamber 24, through refill conduit 26 and into the interior of bellows 18.

20 First flow path 30 and second flow path 40 are in fluid communication with bellows 18 through first reservoir outlet 32 and second reservoir outlet 42, respectively. Both flow paths 30 and 40 provide separate fluid communication from the interior of bellows to pump outlet port 70. As will be further explained below, first flow path provides a fixed delivery rate from bellows 18 to pump outlet port 70, while second flow path 40 provides a patient-controlled dosage to pump outlet port 70.

25 The term "path" as used herein refers to the element or elements which provide a conduit or passage through which fluid may be conveyed. The term "in fluid communication" as used herein refers to a structural relationship between elements which permits conveyance of fluid therebetween and does not necessarily imply the presence of a fluid. The term "fluid" as used herein refers to a liquid or gaseous material or a material which includes components which are liquid or gaseous or both.

30 Referring particularly to FIGURE 3, first flow path 30 provides a fixed flow rate of drug from reservoir 18 to pump outlet port 70. A first flow regulator 33 is provided

in fluid communication with first reservoir outlet port 32 to restrict drug flow to a desired rate. Auxiliary injection port 36 is provided for permitting a physician to introduce drug directly into the first flow path 30. Auxiliary injection port 36 includes an auxiliary septum 37 and a screen 38 for restricting septum access to needles below a predetermined diameter. This is provided as a safety feature to prevent accidental injection of a pump refill supply of drug into auxiliary injection port 36.

Referring particularly to FIGURES 1 and 4, second flow path 40 begins at second reservoir outlet 42 which conveys drug via recharge conduit 43 from the bellows 18 to patient-controlled pump 50. Patient-controlled pump is provided in the form of a resilient crown 52 which may be constructed of silicone rubber or a like material which has similar characteristics with regard to flexibility and biocompatibility. Crown 52 defines an inner chamber 54 which is in fluid communication with safety valve 60 via discharge conduit 56.

Drug flow from bellows 18 into chamber 54 is limited by recharge flow regulator 44 disposed in second flow path 40 upstream of chamber 54. Recharge flow regulator 44 may be comprised of a porous flow restrictor or micromachined restrictor. Alternatively, the dimensions of recharge conduit 43 may be configured to provide flow-limiting features, for example, by providing a recharge conduit 43 in the form of a capillary passage, or providing a separate capillary tube of suitable length to achieve a desired flow restricting function.

Safety valve 60 includes a valve inlet chamber 62 defined by a diaphragm 64 which is normally biased upwardly to occlude valve passage 65. Actuator 66 includes a projection 68 for engaging diaphragm 64 and displacing it downward to permit egress of fluid from valve inlet chamber 62 to valve outlet 69 and ultimately to pump outlet port 70. Those of ordinary skill will appreciate that the discharge of the drug bolus from patient-controlled pump 50 requires not only patient-initiated compression of resilient chamber 52, but also simultaneous actuation of safety valve actuator 66. Thus, safety valve 60 functions to prevent unintended discharge of drug from patient-controlled pump 50.

In accordance with the invention, the recharge flow rate into the patient-controlled pump 50 is selected to be a desired percentage of the daily fixed flow rate of drug to the patient. This feature of the invention provides a limit on the patient-administered dosage. For example, recharge flow regulator can be selected to provide
5 50% of the fixed daily dose of drug. In that case, the patient would be permitted a total dosage per day of 150% of the dosage provided by the fixed flow of drug through second flow path 40.

The present invention also resides in a flow control assembly 100 illustrated in FIGURES 5-8. Flow control assembly 100 may be used to provide the inventive
10 features on single-port pump configurations. Flow control assembly 100 is also useful for providing an infusion system in which it is advantageous to locate the patient control features in an area of the body remote from the location of the pump.

In accordance with the invention, reservoir pump 110 is in fluid communication with flow control assembly 100 via single-lumen catheter 102. Flow control assembly
15 100 includes a body 104 having an inlet port 105 and an outlet port 106. First fluid control path 132 and second fluid control path 142 are defined within body 104 and provide fixed and patient-controlled flows of drug, respectively, between inlet port 105 and outlet port 106. First fluid control path 132 is provided with a first flow regulator 134 to limit the flow of drug therein to a desired fixed rate. A first flow path 130 is
20 defined by the reservoir pump 110, catheter 102 and first fluid control path 132.

Second fluid control path 142 communicates with a patient-controlled pump 150 having structure identical to that of patient-controlled pump 50, described above with respect to FIGURES 1-4. Recharge flow regulator 144 is provided in the form of a capillary tube coiled beneath pump 150 upstream thereof to limit the flow of drug into
25 patient-controlled pump 150 to a desired value. Second fluid control path 142 is defined within body 104 of fluid control assembly 102 and is in fluid communication with first fluid control path 132. In this manner, the patient-controlled dosage can be combined with the fixed rate of flow in first flow path 130. Second flow path 140 is defined by second fluid control path 142.

10

15

Those skilled in the art will recognize that the preferred embodiments may be altered or amended without departing from the true spirit and scope of the invention, as defined in the accompanying claims.

What is claimed is:

1. A drug delivery system for providing patient control of drug delivery to the patient's body comprising:

- 5 a main pump having a reservoir for containing a supply of drug;
a first flow path for delivering a fixed flow of drug from the reservoir to the body;
a second flow path in fluid communication with the first flow path, the second flow path including a patient-controlled pump therein for permitting a patient to
10 supplement the fixed flow of drug with additional drug dosage.

2. The drug delivery system according to claim 1, wherein the first and second flow paths are defined in a bulkhead of the pump.

15 3. The drug delivery system of according to claim 2, wherein the first flow path is comprised of a first reservoir discharge port in fluid communication with the reservoir and the pump outlet port and wherein the second flow path is comprised of a second reservoir discharge port in fluid communication with the reservoir and the pump outlet port.

20 4. The drug delivery system according to claim 2, wherein the main pump comprises a housing and wherein the patient-controlled pump is incorporated into the housing.

25 5. The drug delivery system according to claim 2, further comprising a safety valve for preventing unintended discharge from the patient-controlled pump.

30 6. The drug delivery system according to claim 2, wherein the patient-controlled pump comprises a resilient pumping chamber in the second flow path.

7. The drug delivery system according to claim 1, further comprising:
a bulkhead on the pump having an outlet port;
a catheter in fluid communication with the outlet port;
a fluid control assembly in fluid communication with the catheter and including
5 a first fluid control path and a second fluid control path defined therein;
wherein the first flow path is defined by the pump bulkhead, the catheter and the
first fluid control path and wherein the second flow path is provided by the second fluid
control path.

10 8. The drug delivery system according to claim 6, further comprising a
safety valve for preventing unintended discharge from the patient-controlled pump.

9. The drug delivery system according to claim 6, wherein the patient-
controlled pump comprises a resilient pumping chamber in the second flow path.

15 10. A fluid control assembly for permitting patient-control of drug delivery
comprising:
a body defining a first fluid control path and a second fluid control path;
a first flow regulator in the first fluid control path for limiting flow
20 therein to a substantially constant rate;
a patient-controlled pump in the second fluid control path for permitting
a patient to discharge a bolus of drug into the second fluid control path;
a second flow regulator in the second fluid control path for limiting the
recharge rate of the patient-controlled pump.

25 11. The fluid control assembly according to claim 10, further comprising a
safety valve in the second fluid control path for preventing accidental discharge of drug
from the patient-controlled pump.

12. The fluid control assembly according to claim 10, further comprising a junction providing fluid communication between the first fluid control path and the second fluid control path.

5 13. The fluid control assembly according to claim 10, wherein the patient-controlled pump is comprised of a flexible crown.

14. The fluid control assembly according to claim 10, wherein at least one of the first and second flow regulators is comprised of a capillary tube.
10

15. The fluid control assembly according to claim 10, wherein at least one of the first and second flow regulators is comprised of a micromachined restrictor.



16. A pump for providing patient control of drug delivery to the patient's
15 body comprising:
a reservoir for containing a supply of drug;
a first flow path for delivering a substantially fixed flow of drug from reservoir to the body; and
a patient-controlled pump in fluid communication with the first flow path for
20 delivering a patient-controlled dosage to supplement the drug flow in the first flow path.

17. The pump according to claim 16, further comprising a bulkhead, the first flow path being defined in the bulkhead and the patient-controlled pump being disposed in a second flow path from the pump reservoir to the first flow path.
25

18. The pump according to claim 17, further comprising a safety valve disposed in the second flow path.

19. The pump according to claim 16, wherein the patient-controlled pump is
30 comprised of a deformable crown.

20. The pump according to claim 16, further comprising a regulator for limiting the flow of drug to the patient-controlled pump.

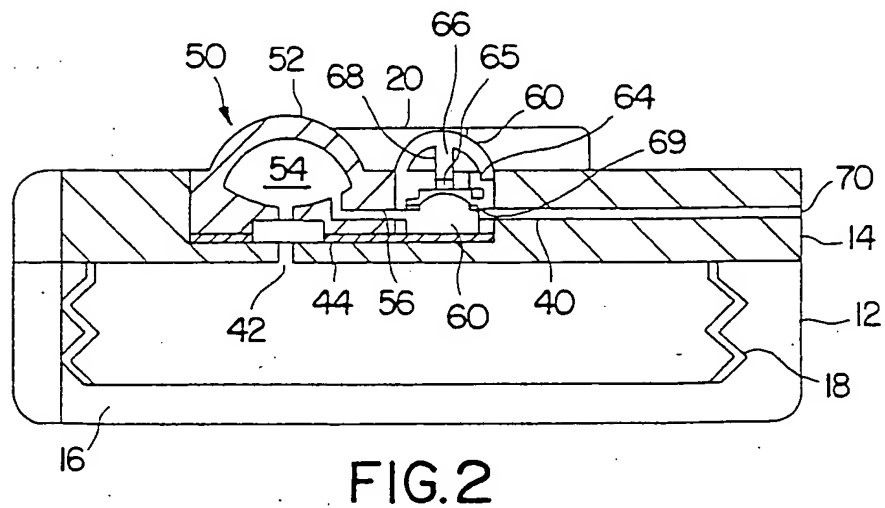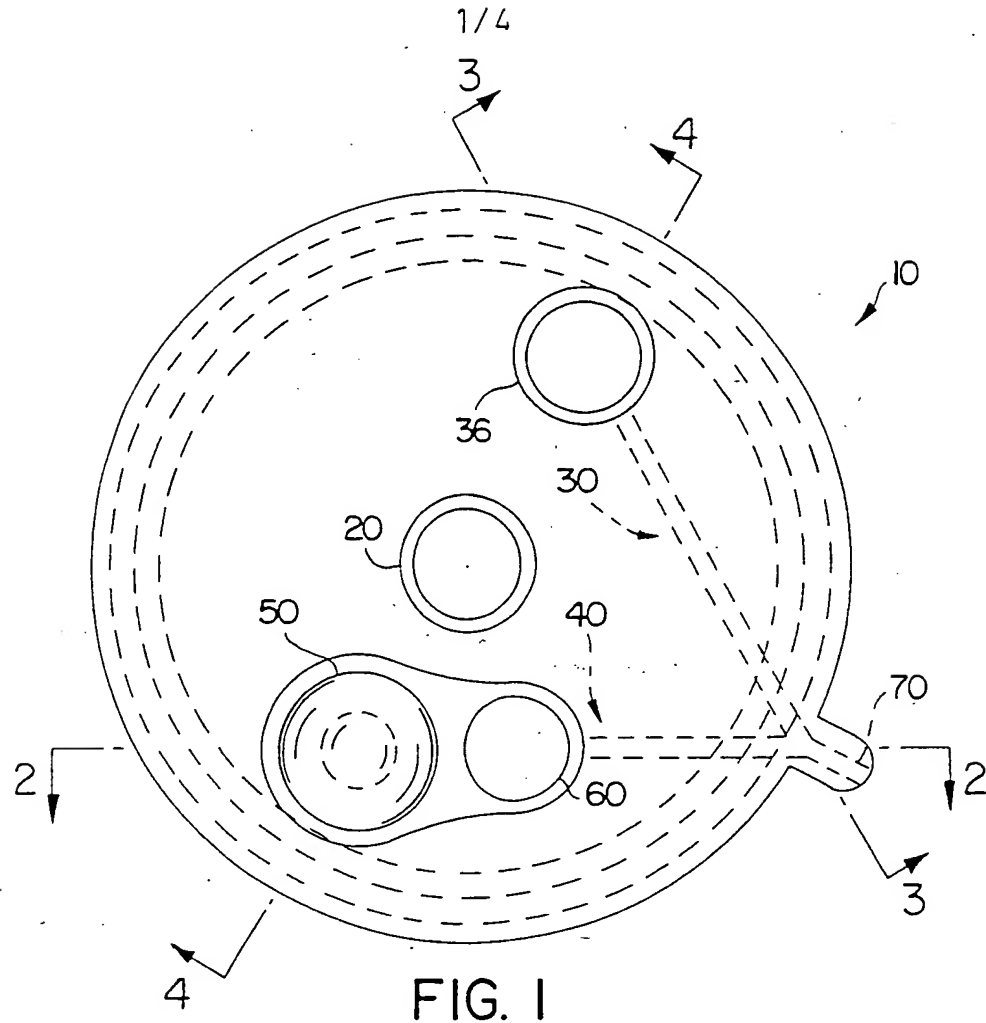

2/4

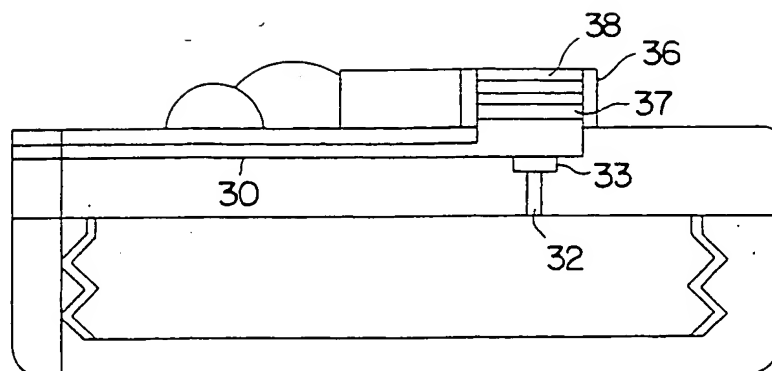


FIG. 3

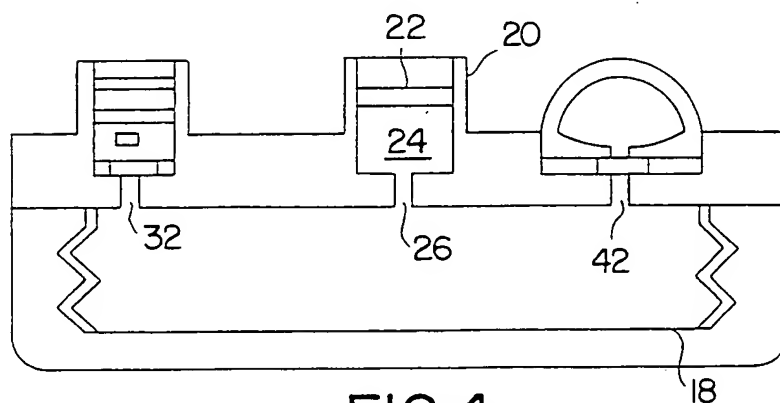


FIG. 4

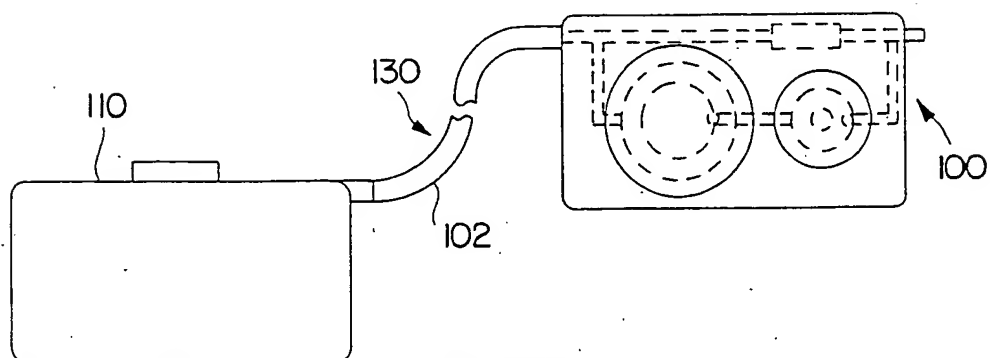


FIG. 5

3/4

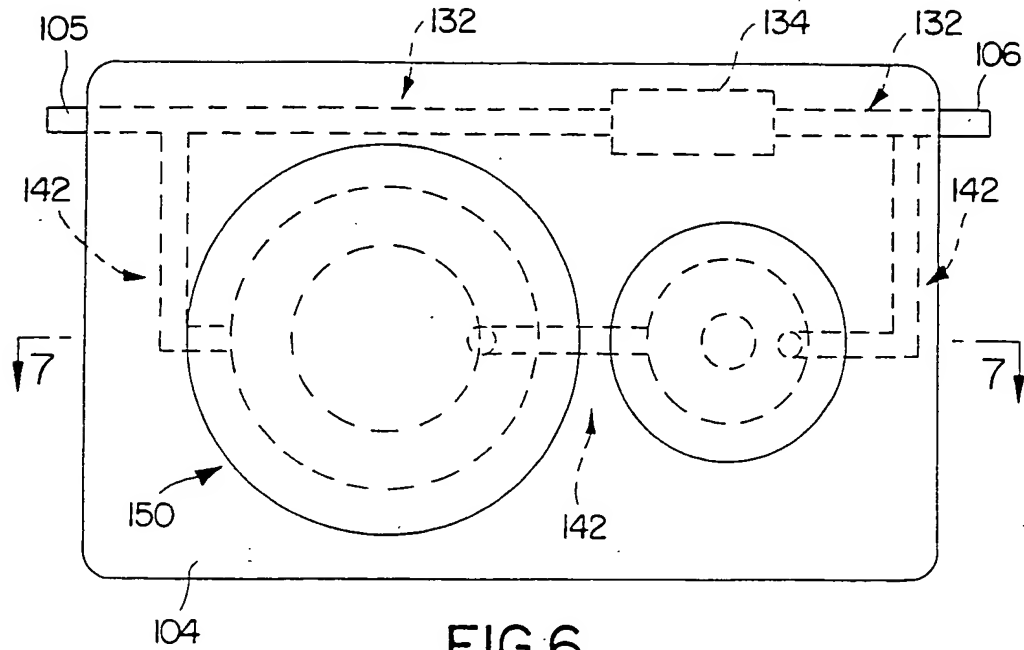


FIG. 6

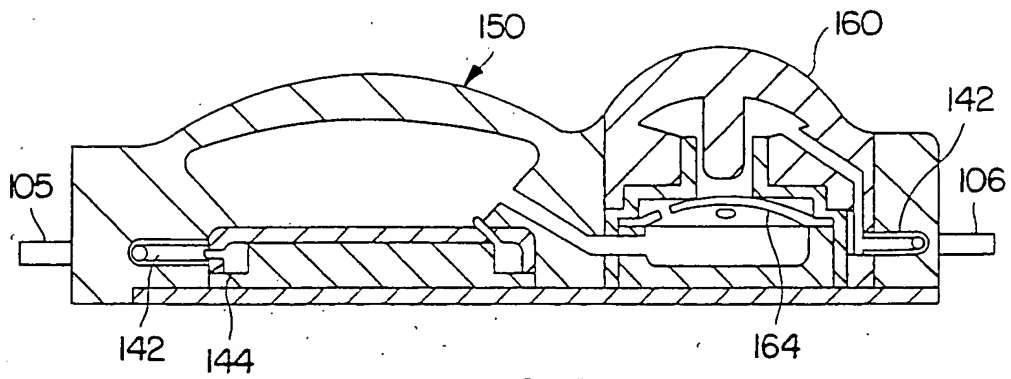


FIG. 7

4/4

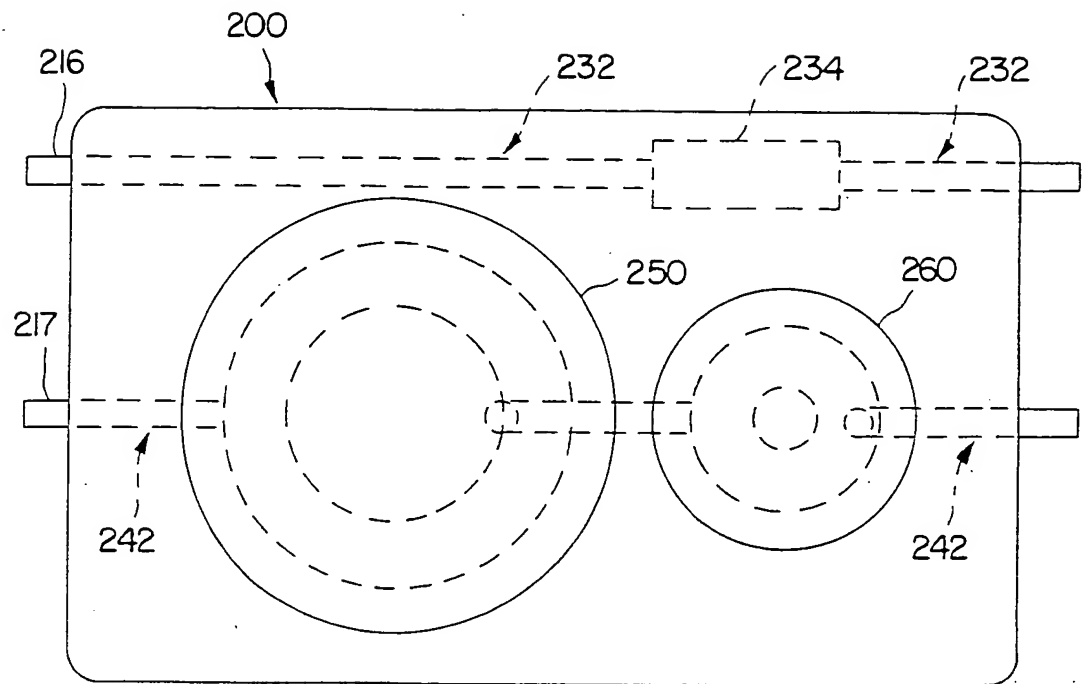


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/08408

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 A61M5/142		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 A61M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 90 12609 A (BAXTER INT) 1 November 1990 (1990-11-01) page 19, line 1 - page 22, line 18 abstract; figures 1,8,9 ---	1, 10, 12, 14, 16
A	WO 97 23252 A (SCIENCE INC) 3 July 1997 (1997-07-03) page 29, line 8 - page 31, line 13 figures 16-18C ---	1, 10, 16
A	US 5 505 707 A (MANZIE PETER ET AL) 9 April 1996 (1996-04-09) abstract; figure 6 -----	1, 10, 16
<div style="display: flex; justify-content: space-between;"> <input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"S" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center;">30 August 1999</div>		Date of mailing of the international search report <div style="text-align: center;">07/09/1999</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center;">Sedy, R</div>

INTERNATIONAL SEARCH REPORT

Information on patent family members

In: International Application No
PCT/US 99/08408

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9012609 A	01-11-1990	US 5011477 A	30-04-1991
		AU 621750 B	19-03-1992
		AU 5526590 A	16-11-1990
		CA 2029865 A,C	22-10-1990
		DE 69007012 D	07-04-1994
		DE 69007012 T	29-09-1994
		EP 0424494 A	02-05-1991
		ES 2052256 T	01-07-1994
		JP 3505538 T	05-12-1991
WO 9723252 A	03-07-1997	US 5807335 A	15-09-1998
		US 5830187 A	03-11-1998
		AU 1429097 A	17-07-1997
		CA 2241365 A	03-07-1997
		CN 1209073 A	24-02-1999
		EP 0874654 A	04-11-1998
US 5505707 A	09-04-1996	NONE	